

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



1244.43343X00  
8061-910 SJP

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s):       Stephane DEDIEU et al  
Serial No.:         10/734,116  
Filed:               December 15, 2003  
For:                 METHOD FOR EXTENDING THE FREQUENCY RANGE  
                      OF A BEAMFORMER WITHOUT SPATIAL ALIASING  
Group:              2837  
Examiner:           To Be Assigned

**CLAIM FOR PRIORITY**

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

April 13, 2004

Sir:

Under the provisions of 35 U.S.C. §119 and 37 C.F.R. §1.55, Applicants hereby claim  
the right of priority based on:

United Kingdom Patent Appln. No. 0229267.0, filed December 16, 2002

A certified copy of the United Kingdom application is attached.

Respectfully submitted,

Donald E. Stout  
Registration No. 26, 422  
ANTONELLI, TERRY, STOUT & KRAUS, LLP  
(703) 312-6600

Attachments  
DES:dlh



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

2 December 2003

Patents Form 1/77  
Patents Act 1977  
(Rule 16)

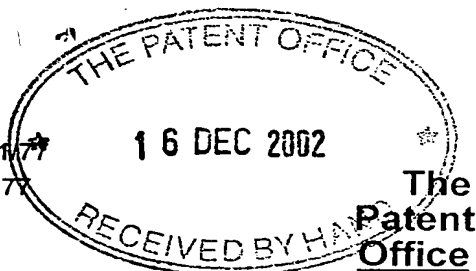

170ED02 E771325-2 002917  
P01/7700 0.00-0229267.0

## Request for grant of a patent

The Patent Office  
Cardiff Road  
Newport  
South Wales NP10 8QQ

1.	Your reference	5454001/CF	16 DEC 2002
2.	Patent Application Number	0229267.0	
3.	Full name, address and postcode of the or of each applicant ( <i>underline all surnames</i> )		
	Mitel Knowledge Corporation 350 Legget Drive Ottawa Ontario K2K 2W7 Canada		
	Patents ADP number ( <i>if known</i> )		
	If the applicant is a corporate body, give the country/state of its incorporation		Country: CANADA <i>ALC 10/2/03</i> State: ONTARIO <i>8508616001</i>
4.	Title of the invention		
	METHOD FOR EXTENDING THE FREQUENCY RANGE OF A BEAMFORMER WITHOUT SPATIAL ALIASING		
5.	Name of agent	Beresford & Co	
	"Address for Service" in the United Kingdom to which all correspondence should be sent	2/5 Warwick Court High Holborn London WC1R 5DH	
	Patents ADP number	1826001	
6.	Priority details		
	Country	Priority application number	Date of filing

## Patents Form 1/77

7. If this application is divided or otherwise derived from an earlier UK application give details

Number of earlier application

Date of filing

8. Is a statement of inventorship and or right to grant of a patent required in support of this request?

YES

9. Enter the number of sheets for any of the following items you are filing with this form.

Continuation sheets of this form

Description 11

Claim(s) 3

Abstract 1

Drawing(s) 10

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and  
right to grant of a patent (*Patents form 7/77*) 1 + 2 copies

Request for preliminary examination  
and search (*Patents Form 9/77*) 1

Request for Substantive Examination  
(*Patents Form 10/77*)

Any other documents  
(*please specify*)

11. I/We request the grant of a patent on the basis of this application

Signature

  
BERESFORD & Co

Date 16 December 2002

12. Name and daytime telephone number of  
person to contact in the United Kingdom

FLEGG; Christopher Frederick  
Tel: 020 7831 2290

Patents Form 7/77  
Patents Act 1977  
(Rule 15)




**Statement of inventorship and of  
right to grant of a patent**

The Patent Office  
Cardiff Road  
Newport  
South Wales NP10 8QQ

1. Your reference **5454001/CF** **16 DEC 2002**
2. Patent Application Number  
accompanying application reference 5454001 **0229267.0**
3. Full name of the or each applicant  
**Mitel Knowledge Corporation**
4. Title of the invention  
**METHOD FOR EXTENDING THE FREQUENCY RANGE OF A BEAMFORMER  
WITHOUT SPATIAL ALIASING**
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent  
**by virtue of employment**
6. How many, if any additional Patents Forms  
7/77 are attached to this form?  
**None**
7. I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are  
the inventor(s) of the invention which the above patent application relates to.

Signature

  
**BERESFORD & Co**

Date **16 December 2002**

8. Name and daytime telephone number of  
person to contact in the United Kingdom **FLEGG; Christopher Frederick  
Tel: 020 7831 2290**

Patents Form 7/77

DEDIEU; Stéphane  
2752 Don Street  
Ottawa  
Ontario  
K2B 6Y8  
Canada

7975568002

MOQUIN; Philippe  
59 Acklam Terr.  
Ottawa  
Ontario  
K2K 2H7  
Canada

7738277003

## METHOD FOR EXTENDING THE FREQUENCY RANGE OF A BEAMFORMER WITHOUT SPATIAL ALIASING

### FIELD OF THE INVENTION

5

The present invention relates in general to microphone arrays, and more particularly to a microphone array incorporating an obstacle and an absorbing material to achieve high directivity at frequencies for which the distance between microphones is greater than half the acoustic wavelength (grating lobes).

10

### BACKGROUND OF THE INVENTION

Directional microphones are well known for use in speech systems to minimise the effects of ambient noise and reverberation. It is also known to use multiple microphones when there is more than one talker, where the microphones are either placed near to the source or more centrally as an array. Moreover, systems are also known for determining which microphone or combination to use (i.e. higher noise and reverberation requires that an increased number of directional microphones be used). In teleconferencing situations, it is known to use arrays of directional microphones associated with an automatic mixer. The limitation of these systems is that they are either characterised by a fairly modest directionality or they are of costly construction.

Microphone arrays have been proposed to solve the foregoing problems. They are generally designed as free-field devices and in some instances are embedded within a structure. The limitation of prior art microphone arrays is that the inter-microphone spacing is restricted to half of the shortest wavelength (highest frequency) of interest. This means that for an increase in frequency range, the array must be made smaller (thereby losing low frequency directivity) or microphones must be added (thereby increasing cost). The other problem with this approach is that the beamwidth decreases with increasing frequency and side lobes become more problematic. This results in significant off axis "coloration" of the signals. As it is impossible to predict when a talker will speak, there is necessarily a time during which the talker will be off axis and this "coloration" will degrade the signal.



It is an object of this invention to provide a microphone array having a reasonably constant beam pattern over a frequency range that extends beyond the traditional limitation of inter-sensor spacing to half a wavelength.

5

The following references illustrate the known state of the art:

- [1] Michael Brandstein, Darren. Ward, "Microphone arrays", Springer, 2001.
- 10 [2] Gary Elko, "*A steerable and variable first-order differential microphone array*", US Patent 6,041,127, Mar. 21, 2000.
- [3] Michael Stinson, James Ryan, "*Microphone array diffracting structure*", Canadian Patent Application 2,292,357.
- 15 [4] Jens Meyer, "*Beamforming for a circular microphone array mounted on spherically shaped objects*", Journal of the Acoustical Society of America 109 (1), January 2001, pp. 185-193.
- 20 [5] Marc Anciant, "*Modélisation du champ acoustique incident au décollage de la fusée Ariane*", July 1996, Ph.D. Thesis, Université de Technologie de Compiègne, France.
- 25 [6] A.C.C. Warnock & W.T. Chu, "*Voice and Background noise levels measured in open offices*", IRC Internal Report IR-837, January 2002.
- [7] S.Dedieu, P.Moquin, "*Broadband Constant directivity beamforming for non linear and non axi-symmetric arrays*", UK Patent Application No. 8061-734.
- 30 [8] Morse and Ingard, "Theoretical Acoustics", Princeton University Press, 1968.

Brandstein and Ward [1] provide a good overview of the state of the art in free-field arrays. Most of the work in arrays has been done in free field, where the size of the array is necessarily governed by the frequency span of interest.

The use of an obstacle in a microphone array is discussed in Elko [2]. Specifically, Elko uses a small sphere with microphone dipoles in order to increase wave-travelling time from one microphone to another and thus achieve better performance in terms of directivity. A sphere is used since it permits analytical expressions of the pressure field generated by the source and diffracted by the obstacle. The computation of the pressure at various points on the sphere allows the computation of each of the microphone signal weights. The spacing limit is given as  $2\lambda/\pi$  (approx.  $0.64\lambda$ ) where  $\lambda$  is the shortest wavelength of interest.

10

M. Stinson and J. Ryan [3] extend the principle of microphone arrays embedded in obstacles to more complex shapes using a super-directive approach and a Boundary Element method to compute the pressure field diffracted by the obstacle. Stinson and Ryan emphasise low frequency, trying to achieve strong directivity with a small obstacle and a specific treatment using cells (i.e. reactive impedance) thereby inducing air-coupled surface waves. This results in an increase in the wave travel time from one microphone to another and increases the "apparent" size of the obstacle for better directivity at low frequencies. Stinson and Ryan have proven that using an obstacle provides correct directivity in the low frequency domain, when generally other authors use microphone arrays of large size. Additionally Stinson and Ryan invoke the use of acoustic absorbent materials to provide impedance treatment. However, the application is designed for narrow band telephony.

20

The benefit of an obstacle for a microphone array in terms of directivity and localisation of the source or multiple sources is also described in the literature by Jens Meyer [4] and by Marc Anciant [5]. Jens Meyer demonstrates the benefit of adding a sphere on a microphone array compared to a free-field array in terms of broadband performance and noise rejection. Anciant describes the "shadow" area for a 3D-microphone array around a mock-up of the Ariane IV rocket in detecting and characterising the engine noise sources at take-off.

25

30

With the exception of Elko [2] (who sets the spacing limit at  $2\lambda/\pi$ ), the prior art explicitly or implicitly concedes the requirement for a high frequency performance limit defined by an inter-element spacing of  $\lambda/2$  to avoid grating lobes in free-field.

5 The superdirective beamformers that are commonly used for microphones are discussed in chapter 2 of Brandstein [1] and the essential elements are noted below, to better understand the background of the present invention.

Beamforming may be used to discriminate a source position in a “noisy”  
 10 environment at a frequency  $\omega$  in a band  $[\omega_0, \omega_n]$ . Let  $d(\omega)$  be the signal vector containing the signal  $d_i(\omega)$  of each microphone of the array when the source is active. Let  $n(\omega)$  be the vector of noise signal at each microphone and  $R_{nn}(\omega)$  the noise correlation matrix. Depending on the environment, this matrix can be defined in different ways, such as for diffuse spherical or cylindrical isotropic noise or more  
 15 simply for white noise. Reference [5] provides a detailed discussion of how the noise correlation matrix may be defined.

Beamforming consists of finding a vector  $w_{opt}(\omega)$  of coefficients  $w_i(\omega)$  such that weighting the signal  $d_i(\omega)$  at each microphone with each  $w_i(\omega)$  creates a beam  
 20 towards the source. For a super directive approach, the problem can be written in the following way:

$$\text{Min}_w \frac{1}{2} w^H R_{nn} w \quad \text{subject to} \quad w^H d = 1 \quad (1)$$

25 where the dependency in  $\omega$  has been omitted for clarity purposes.

The optimal weight vector is:

$$w_{opt} = \frac{R_{nn}^{-1} d}{d^H R_{nn}^{-1} d} \quad (2)$$

As described in copending Patent Application **Mitel 8061-734** linear or quadratic constraints can be added to impose a specific pattern to the beam, to reduce the coupling between the microphone beam and loudspeaker or to keep the beam constant vs. frequency or vs. angle when the obstacle is not axi-symmetric.

5

## SUMMARY OF THE INVENTION

According to the present invention, a method of spatial filtering of a microphone array is provided in which the distance between microphones (or sensors)  
10 is greater than  $\lambda/2$  (where  $\lambda$ =acoustic wavelength)

More particularly, a plurality of microphones are embedded in a diffraction structure that provides the desired directivity at high frequencies. In one embodiment, acoustically absorptive materials are used on the object. To provide the desired  
15 directionality at lower frequencies, beamforming of the microphones is performed using digital signal processing techniques. The combination of beamforming and embedding the microphones in a diffraction structure that provides the desired directivity at high frequencies addresses the two weaknesses that arise in prior art approaches: low frequency directivity with small structures and high frequency  
20 difficulties that arise in conventional sensor arrays.

One advantage of the invention is the extension of the working frequency range for an existing narrow-band telephony microphone array to wide-band telephony (up to 7 kHz), without modifying its geometry and the number of  
25 microphones. The invention effectively extends the working frequency range of a microphone array beyond its "limit" frequency, which depends on the inter-microphone distance. The invention operates at frequencies where beamforming is possible with only one or two microphones. Thus, the invention is operable with omnidirectional microphones, resulting in cost reduction and the ability to use  
30 inexpensive DSPs.

## BRIEF DESCRIPTION OF THE DRAWINGS

A detailed description of the invention is provided herein below, with reference to the following drawings, in which:

Figure 1 is a plot of mouth directivity as is known from the prior art;

5

Figure 2 is a plot of directivity for a single microphone on the surface of a hard diffracting sphere;

Figure 3 is a schematic illustration of the microphone array and a point sound source, according to the preferred embodiment of the invention;

10

Figure 4 shows the three dimensional co-ordinates used in describing operation of the microphone array of Figure 3;

15

Figure 5 is a BE mesh model of the microphone array of Figure 3;

Figure 6 is a plot of acoustic pressures for the microphone array of Figure 3;

Figure 7 is a plot of directivity for a single microphone in the array of Figure

20 2;

Figure 8 shows placement of an acoustic absorbent material on a surface of the microphone array, according to the preferred embodiment;

25

Figure 9 is a plot showing an improvement in directivity for a single microphone resulting from the placement of acoustic absorbent material in Figure 8; and

30

Figure 10 shows the beampattern of the microphone array of the present invention at various frequencies.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

To illustrate the principles of the invention a conventional spherical shape is set forth for the array of embedded microphones. However, the concepts as applied to this simple shape (a sphere) may be extended to more complicated shapes, as will be readily understood by a person of ordinary skill in the art.

5

Firstly, an enclosure is provided for the microphones that acts as a diffracting object to provide the desired high frequency response. In order to reduce costs, omnidirectional electret microphones are used. This also simplifies the design as it assumed that the microphones simply sample the pressure field at the surface of the diffracting object and that the microphones are rigid. Secondly, these microphones are combined into an array to achieve the low frequency response required, as discussed in greater detail below. Thirdly, a transition area is established where the system reverts from microphone array operation to selecting a single microphone.

15

In order to simplify the acoustical modelling, it will be assumed that the source of interest is an acoustical monopole. As the primary application of the invention is speech (i.e. conferencing) one must consider the directionality of the human voice. Recent measurements by Warnock [6] are illustrated in Figure 1. It will be observed that within a 90 degree sector in front of a talker the human voice can be modelled as an acoustic monopole. It will also be noted that as the frequency increases the directivity of the voice increases so that directivity of the microphone system is not as necessary for high frequencies.

20

### A Spherical Baffle

25

An analytical solution to the problem of a hard sphere is provided in Morse [8] (equation 7.2.18). An alternate solution is found in Meyer [4]. Considering the pressure field from a plane wave impinging upon the sphere from various directions, the pressure at a point on the sphere indicates the directionality. Naturally, the solution scales with the size of the object and the frequency. As illustrated in Figure 2, no significant directionality occurs at frequencies below approximately  $ka < 2$  where  $k=2\pi f/c$  ( $f$  = frequency,  $c$  = speed of sound) and  $a$  is the radius of the sphere.

30

At lower frequencies (up to  $D=\lambda/2$  where  $D$  is the inter-element spacing) multiple microphones may be disposed on the sphere as suggested by Meyer [4] or Elko [2], thereby extending Meyer's 0.2m diameter spherical array to cover up to 20kHz.

5

There remains a transition area between the low frequencies where the beamformer works well and the higher frequencies, which offer increased directionality. The method proposed herein uses a constrained super-directive approach as disclosed in UK Patent Application No. 8061-734. By using two symmetrical look direction vectors  $d_{\theta-\alpha}$  and  $d_{\theta+\alpha}$  with a gain constraint less than one (e.g. 0.707), a beam that is wider than the superdirective method is produced, but which is narrower than that provided by simply using a diffracting object. The spacing of the two directions ( $\theta-\alpha$  and  $\theta+\alpha$ ) increases with frequency. Eventually, the frequency weights degenerate to  $w_{opt} = \langle 1, 0, 0, 0, 0, 0 \rangle$  for a six-element array at  $\theta=0$ . One skilled in the art of acoustics will be able to determine the required variation in  $\alpha$  with frequency, as it is dependent on the obstacle geometry.

15

The application of analytical equations to the simple shape of a sphere may be extended to other simple shapes (e.g. cylinders). Moreover, the same principles may be applied to more complex shapes, that are closer to a realistic product.

20

#### An Inverted Truncated cone upon a Reflecting Plane

The Mitel 35xx conference unit conforms essentially to the shape of an inverted truncated cone, as illustrated in Figure 3. The size of the obstacle (i.e. housing of the conference unit) is constrained by industrial design considerations. The number of microphones is optimised to six so that the distance between microphones is 5 cm., thereby providing alias-free spatial sampling in the traditional telephony frequency band (i.e. 300-3400 Hz). Figure 4 illustrates the spatial co-ordinates used (spherical co-ordinates where  $\theta$  is the x-y plane and  $\psi$  is the angle between the z direction and the x-y plane). It will be appreciated that illustrated geometry does not allow an easy analytical solution and that numerical methods must be used.

30

Assuming a perfectly rigid obstacle, the Boundary Element Method may be used to create the model of Figure 5, which accounts for a rigid plane and impedance conditions on the surface when an absorbing material is used. The typical source is an acoustic monopole at ( $r=1\text{ m}$ ,  $\theta=0\text{ deg}$ ,  $\psi=20\text{ deg}$ ) with an amplitude of  $1\text{ N/m}^2$ .

- 5 Solution of the problem using the Boundary Element Method gives the total pressure field on the obstacle: the sum of the incident and diffracted fields.

It will be noted from Figure 6 that as compared to free-field conditions, the wave travel time from one microphone to another is increased, as has been described in [2] and [3]. Secondly, the pressure magnitude at the microphones facing the source is enhanced compared to the microphones in the opposite direction, in this case by about 8 dB.

Thus, a small obstacle of about 10 cm diameter provides a shadow effect resulting in an increase of the attenuation starting close to 400 Hz and reaching a maximum of 9 dB at about 2.5 kHz for microphones in the source opposite direction (microphones 3,4,5 in Figures 3 and 6). This is contrasted with only a 2 dB difference in free field in the presence of a rigid plane (dotted lines in Figure 6). It will also be noted that due to symmetry, the curves for microphones 5 and 6 overlap the curves for microphones 3 and 2, respectively.

All of the possible sources at reasonably spaced (10 degrees in the preferred embodiment) intervals for  $\theta$  and  $\psi$  can then be computed. As a result of the reflecting plane, only the angles from 0 to 90 degrees are required for  $\psi$ . Using this data the beam pattern for a microphone in the object may be obtained. Figure 7 illustrates these results, both from numerical simulation and actual measurements, in the plane of elevation of interest for the preferred embodiment. It will be noted from Figure 7 that the results indicate a well-behaved cardioid that is reasonably constant with frequency. The measured results were taken with a B&K 4227 artificial mouth and are in good agreement with the numerical model, thereby justifying the monopole source simplification.



Next, the directivity can be further enhanced by the use of an absorptive material.

According to the invention, a layer of acoustic absorbent material (such as open cell foam or felt) is applied in a thin layer to the surface of the obstacle to absorb sound at high frequencies. Thus, the surface of the obstacle becomes a combination of perfectly reflecting rigid boundary (specific impedance  $\beta=0$ ) and a boundary with a real specific impedance  $0<\beta<1$ , (i.e. pure absorbing conditions with no reactive impedance). The amount of absorption depends on the type of material used and on its dimensions and thickness. However, a layer of absorbent material having thickness of about  $\lambda/4$  or higher is generally required to trap sound waves of wavelength  $\lambda$ .

In the preferred embodiment, a 5-mm thick layer of felt is used to provide an increase in absorption from 5 to 7 kHz, thereby increasing microphone directivity as compared with the hard plastic enclosure (rigid case).

The placement of the absorption material is important. In order to avoid attenuation at the microphones, the material must be separated from the microphones. Thus, as shown in Figure 8, only the surface between the microphones is covered with material.

Figure 9 shows the improvement in the measured microphone directivity with surface treatment as compared with a surface that has not been treated with acoustic absorption material. A significant narrowing of the beampattern is shown from 5 kHz.

The resulting directivity is satisfactory at 6kHz and 7kHz. Using a numerical method to calculate the sound fields and the BEM method as in [3], [5] and [7] and applying the superdirective approach, grating lobes will be observed as the  $\lambda/2$  limit is approached (see the left-hand column of Figure 10). In this particular case, after 4000 Hz the  $w_{opt}$  degenerates to  $\langle 1,0,0,0,0,0 \rangle$ . The results for such an abrupt transition are reasonably good but one can see a significant widening of the main lobe in the 4kHz to 5kHz region.

The grating lobes in these beams may be corrected as illustrated in the right hand column of Figure 10, and the transition made less abrupt, by using linear constraints, as set forth in co-pending Patent Application Mitel 8061-734. Using two symmetrical look directions  $d_{\theta-\alpha}$  and  $d_{\theta+\alpha}$  with a gain constraint less than one (e.g. 0.707) results in a beam that is wider than the superdirective method but narrower than is provided by only using a diffracting object. The spacing of these two directions ( $\theta-\alpha$  and  $\theta+\alpha$ ) is controlled by  $\alpha$  which increases with frequency. Eventually the frequency weights degenerate to  $w_{opt} = \langle 1, 0, 0, 0, 0, 0 \rangle$  for a six-element array at  $\theta=0$ . One skilled in the art of acoustics will be able to determine required variation in  $\alpha$  with frequency, as it is dependent on the obstacle geometry.

A person skilled in the art may conceive of variations or modifications of the invention. For example, by choosing a more efficient or thicker absorbing material, the directivity at 4000 kHz can be further improved. All such variations and modifications are believed to be within the sphere and scope of the present invention.

A person skilled in the art will also recognise that the principles embodied herein can be applied to wave sensors that are not microphones (e.g. radio-frequency antennae, hydrophones, etc.). The diffracting structure would have to operate at the frequencies of interest (a choice of materials and size will be obvious to one skilled in the art) and this permits a spacing larger than  $\lambda/2$  as the grating lobes are attenuated by the diffracting structure.

We claim:

1. A method of extending the frequency range of a microphone array embedded  
5 in a diffracting object beyond a microphone spacing limitation of  $\lambda/2$ , where  
 $\lambda$ =acoustic wavelength, comprising:  
    configuring said diffracting object to obtain a desired high frequency  
    directivity response at predetermined microphone positions on said diffracting object;  
    providing a low frequency beamformer operable at said predetermined  
10 microphone positions to achieve a desired low frequency directivity response; and  
    applying linear constraints to said beamformer for providing a smooth  
    transition between said low and high frequency directivity responses.
2. The method of claim 2, comprising applying a thin layer of acoustic absorbent  
15 material to the surface of said diffracting object to absorb sound at high frequencies.
3. The method of claim 2, wherein said acoustic absorbent material is applied  
between respective ones of said microphones.
- 20 4. The method of claim 3, wherein said acoustic absorbent material is applied to  
a thickness of about  $\lambda/4$  or higher to trap sound waves of wavelength  $\lambda$ .
5. A conferencing unit, comprising:  
    an array of microphones embedded in a diffracting object configured to  
25 provide a desired high frequency directivity response at predetermined microphone  
    positions on said diffracting object; and  
    a low frequency beamformer operable at said predetermined microphone  
    positions to achieve a desired low frequency directivity response, wherein said  
    beamformer is linearly constrained to provide a smooth transition between said low  
30 and high frequency directivity responses.

6. The conferencing unit of claim 5, further including a thin layer of acoustic absorbent material applied to the surface of said diffracting object to absorb sound at high frequencies.
- 5 7. The conferencing unit of claim 6, wherein said acoustic absorbent material is applied between respective ones of said microphones.
8. The conferencing unit of claim 7, wherein said acoustic absorbent material is applied to a thickness of about  $\lambda/4$  or higher to trap sound waves of wavelength  $\lambda$ .
- 10 9. The conferencing unit of claim 6 wherein said acoustic absorbent material is one of either open cell foam or felt.
10. The conferencing unit of claim 5, wherein said beamformer is linearly  
15 constrained using two symmetrical look directions  $d_{\theta-\alpha}$  and  $d_{\theta+\alpha}$  with a gain constraint less than one where the spacing  $\theta-\alpha$  and  $\theta+\alpha$  is controlled by  $\alpha$  which increases with frequency.
11. The conferencing unit of claim 10, wherein said gain constraint is  
20 approximately 0.707.
12. A method of extending the frequency range of a wave sensor array embedded in a diffracting object beyond a inter sensor spacing limitation of  $\lambda/2$ , where  $\lambda$ =acoustic wavelength, comprising:
- 25 configuring said diffracting object to obtain a desired high frequency directivity response at predetermined sensor positions on said diffracting object;  
providing a low frequency beamformer operable at said predetermined sensor positions to achieve a desired low frequency directivity response; and  
applying linear constraints to said beamformer for providing a smooth  
30 transition between said low and high frequency directivity responses.

13. A conferencing unit substantially as hereinbefore described with reference to and as shown in any of the accompanying drawings.

5

14. A method of forming a conferencing unit substantially as hereinbefore described with reference to and as shown in any of the accompanying drawings.


10

ABSTRACT.METHOD FOR EXTENDING THE FREQUENCY RANGE OF A  
BEAMFORMER WITHOUT SPATIAL ALIASING

5 A conferencing unit, comprising an array of microphones embedded in a  
diffracting object configured to provide a desired high frequency directivity response  
at predetermined microphone positions, and a low frequency beamformer operable to  
achieve a desired low frequency directivity response, wherein the beamformer is  
linearly constrained to provide a smooth transition between low and high frequency  
directivity responses.

10

Figure 3 refers

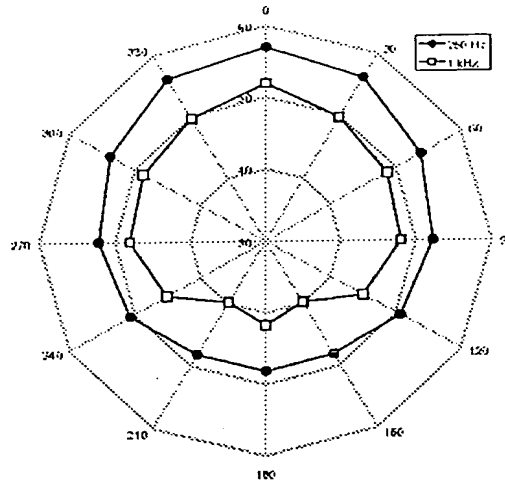

Directivity measured for male talkers for the 250 and 1000 Hz octave bands.

Figure 1: Mouth directivity. Warnock and Chu [6].

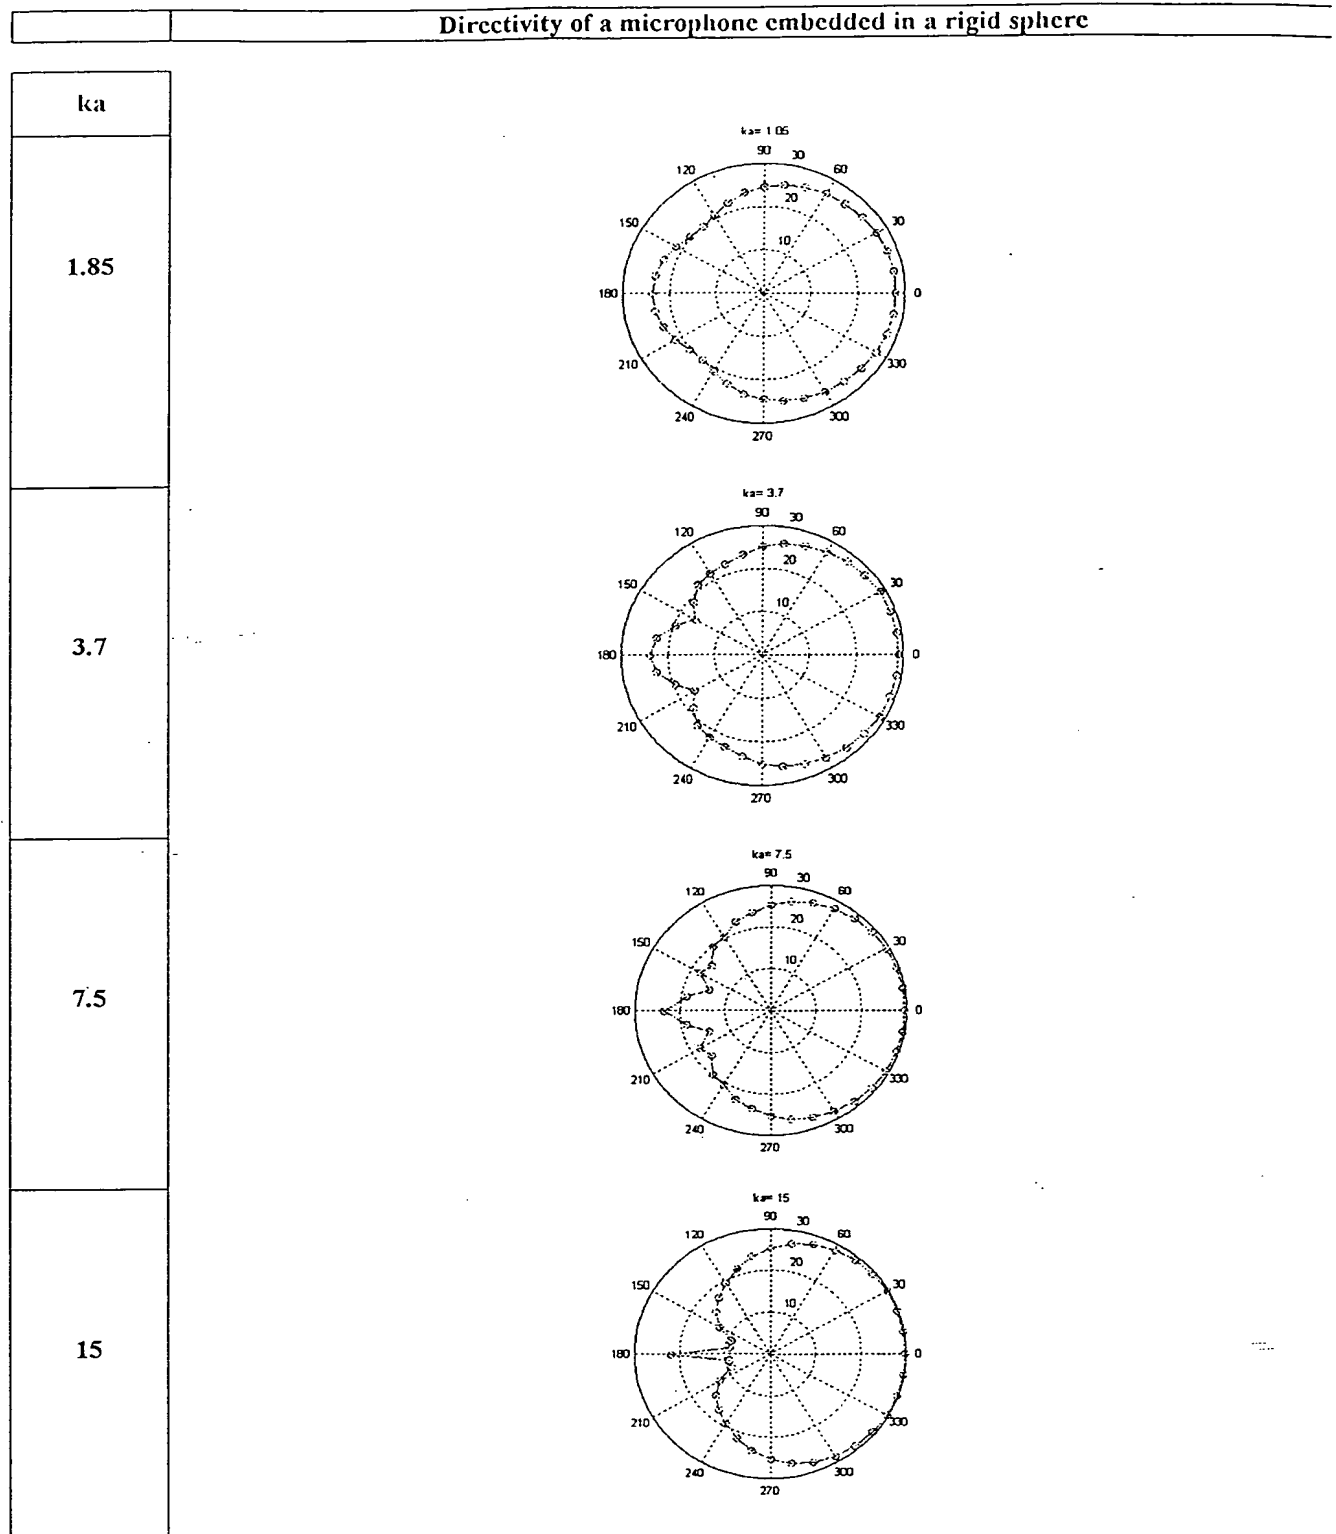


Figure 2: Directivity due to a hard sphere



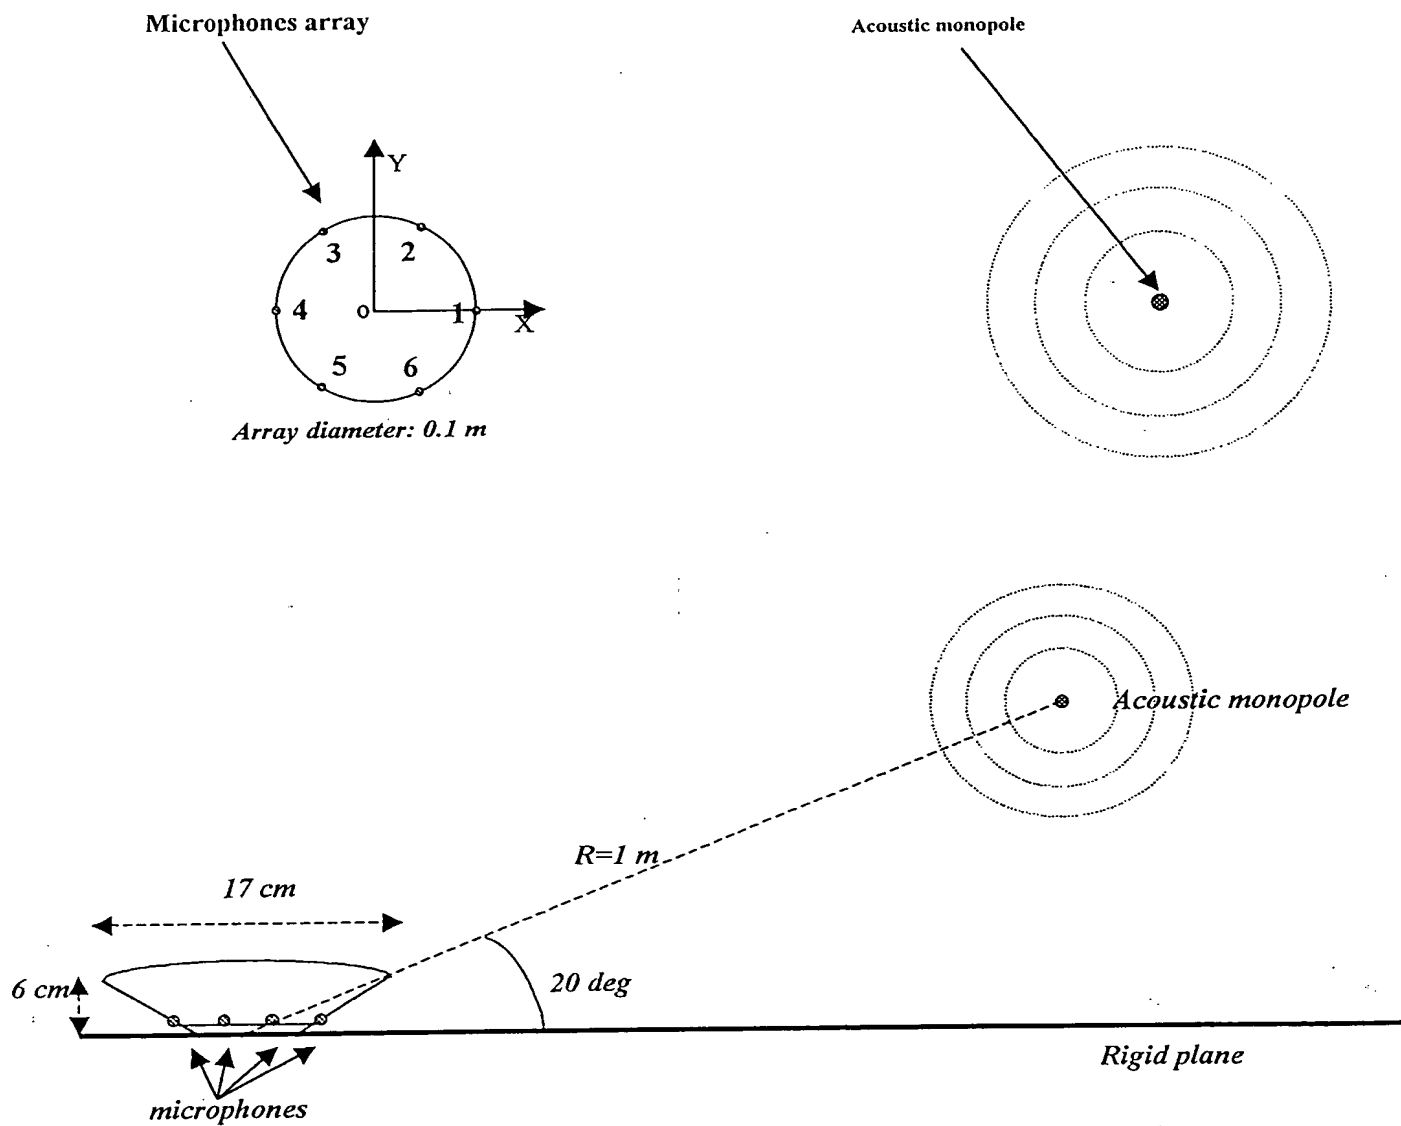


Figure 3: Schematic of the 6 microphone array. For most of the directivity patterns, the source is at a latitude  $\Psi=20\text{ deg}$  and at a distance of 1 m from the origin point o.

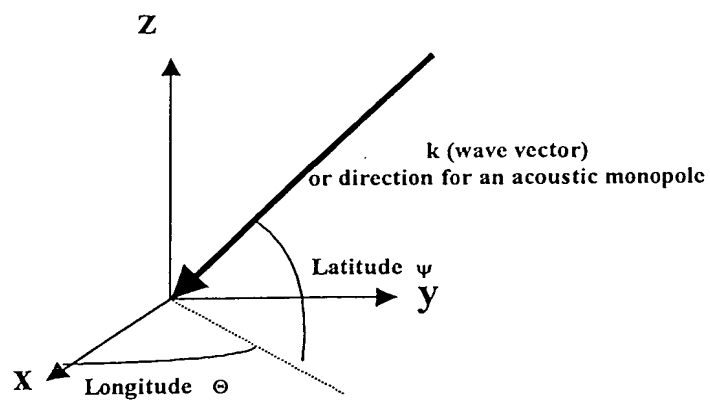


Figure 4: co-ordinate system

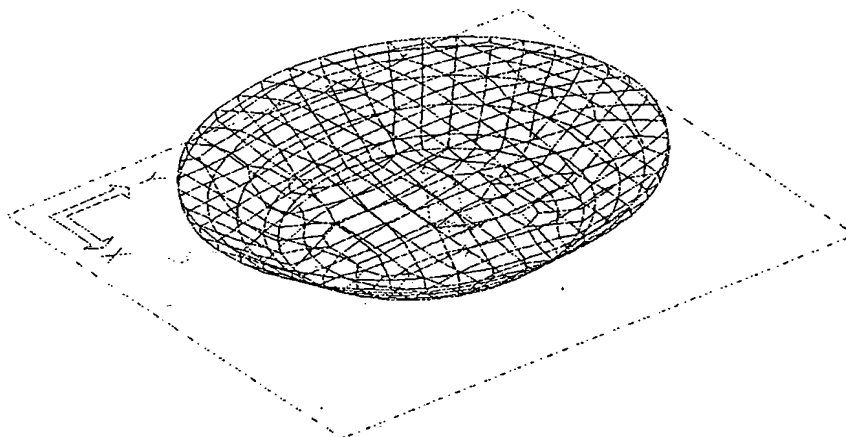


Figure 5: BE mesh for the model of the speakerphone conference unit. (I-DEAS Vibroacoustic).

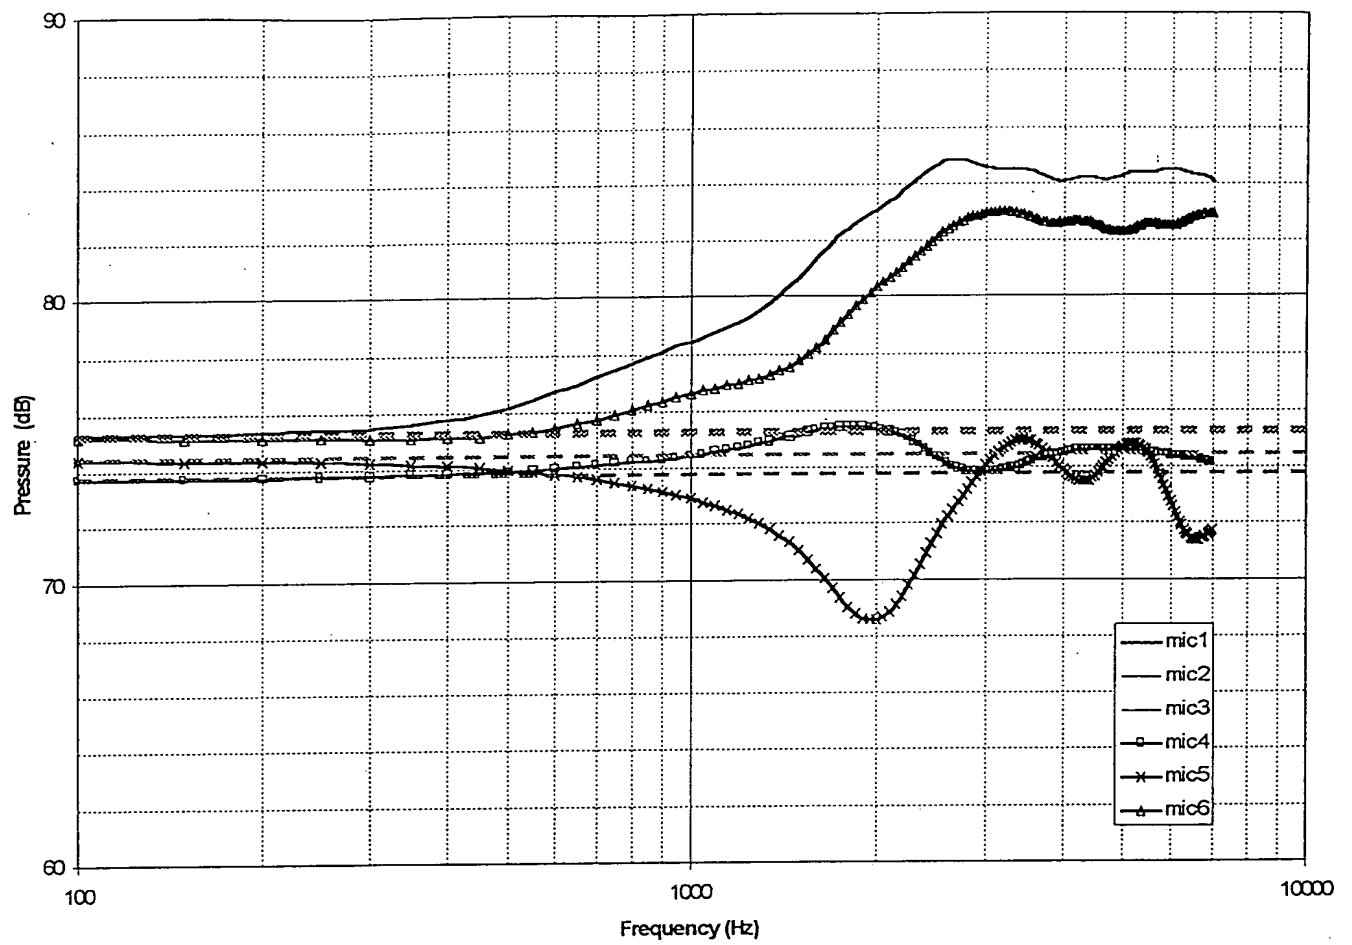


Figure 6: Magnitude of the pressure at the 6 microphones.  
Source at  $r=1m$   $\theta=0$ ,  $\phi=80$  degrees

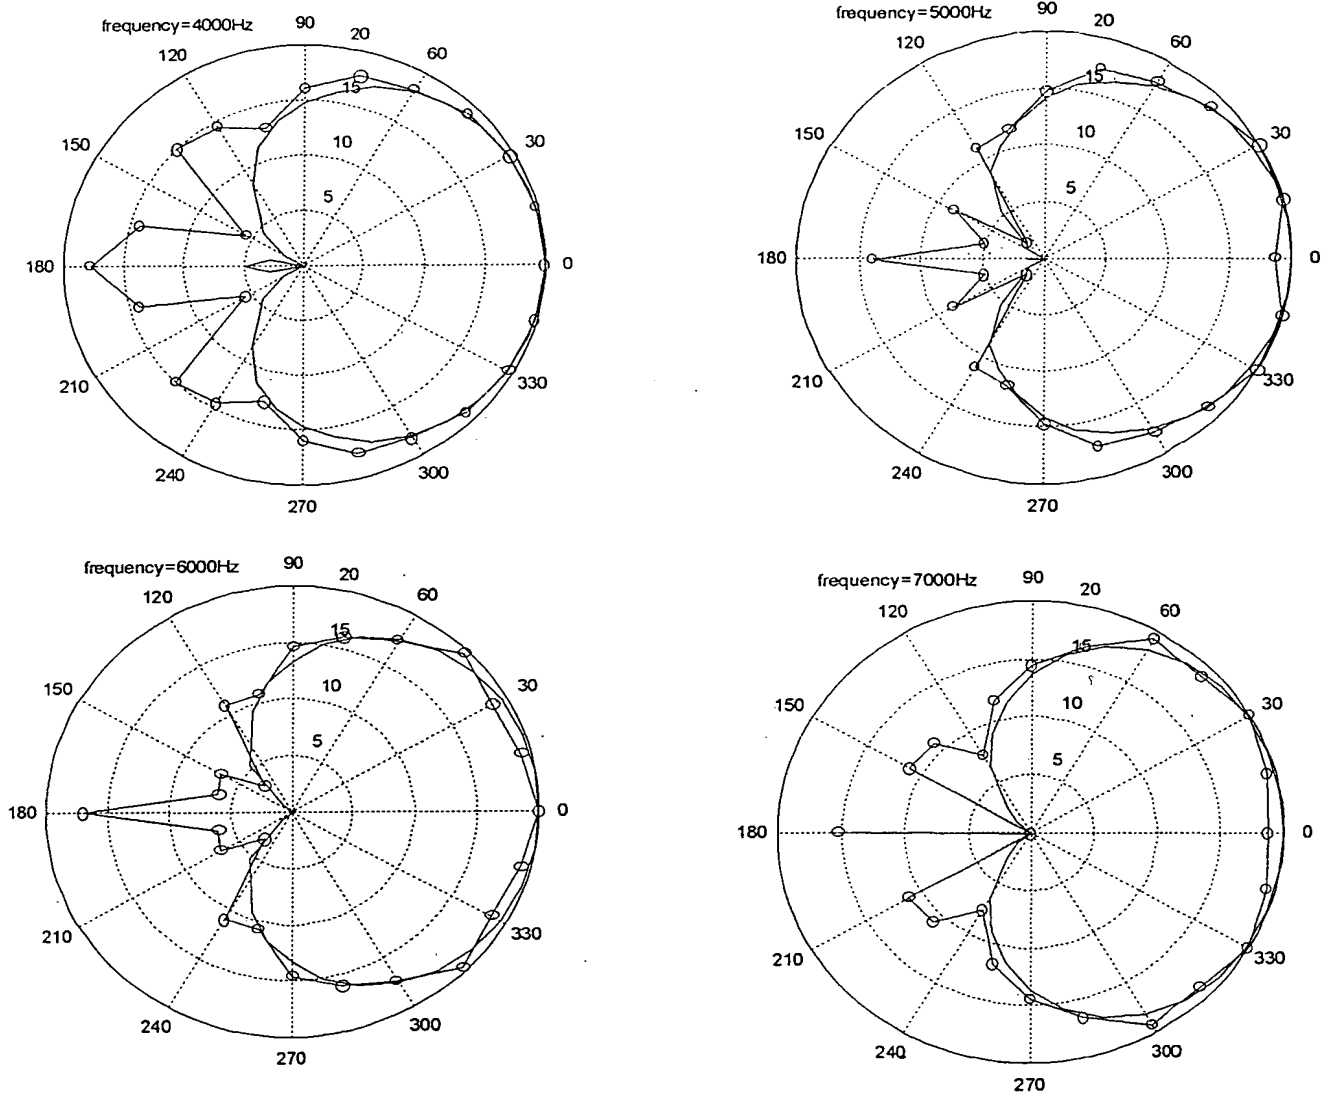
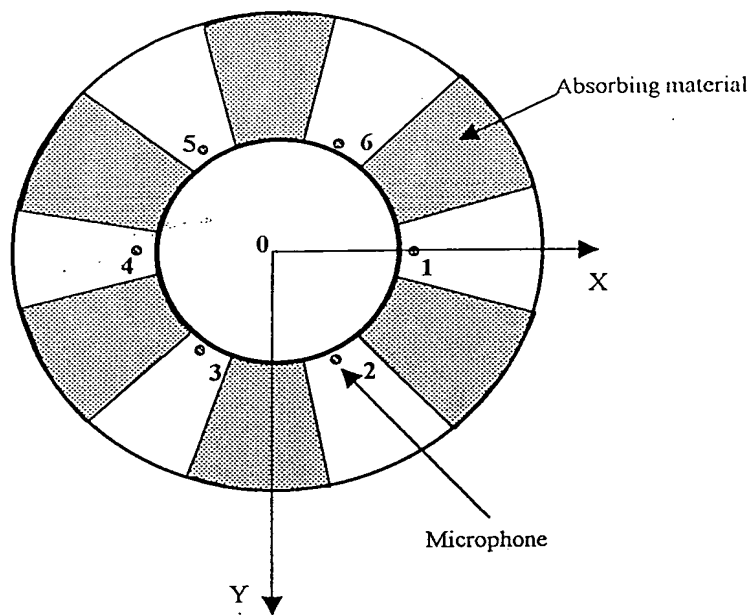
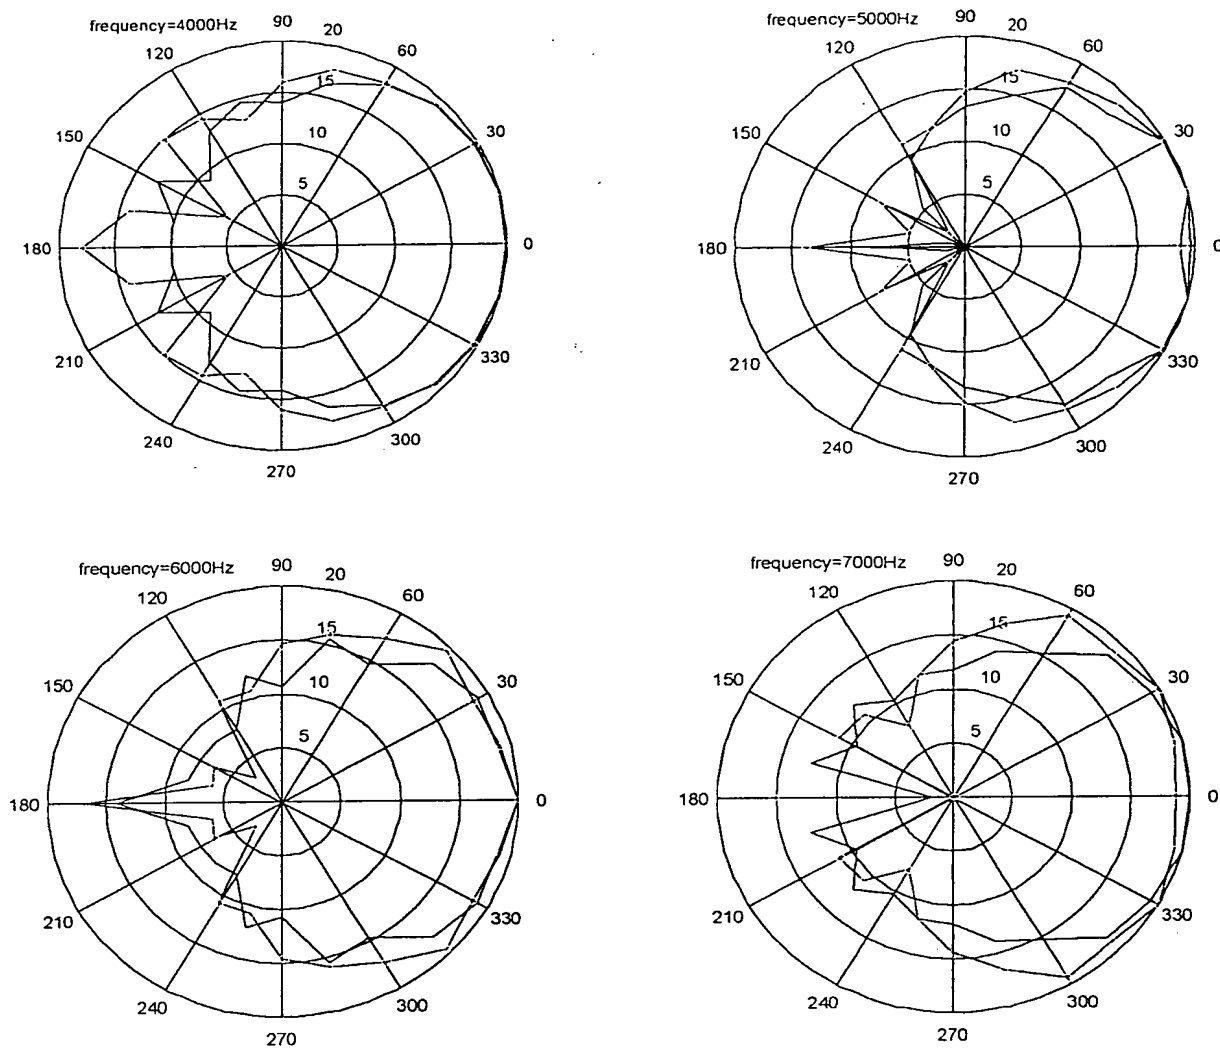


Figure 7: Microphone directivity at 4, 5, 6, 7 kHz.  
 BEM Prediction using acoustic monopoles at  $r=1m$ ,  $\psi=20deg$ ,  $\theta$  variable (--)  
 and Measurement using an artificial mouth at the same positions (-o-).



*Figure 8: Bottom view of the array obstacle showing the location of absorptive treatment.*



*Figure 9: Microphone directivity at 4, 5, 6, 7 kHz.  
 Without acoustic treatment(-o-), with acoustic treatment (- -)  
 Measurement using the artificial mouth at  $r=1\text{m}$ ,  $\psi=20\text{deg}$*

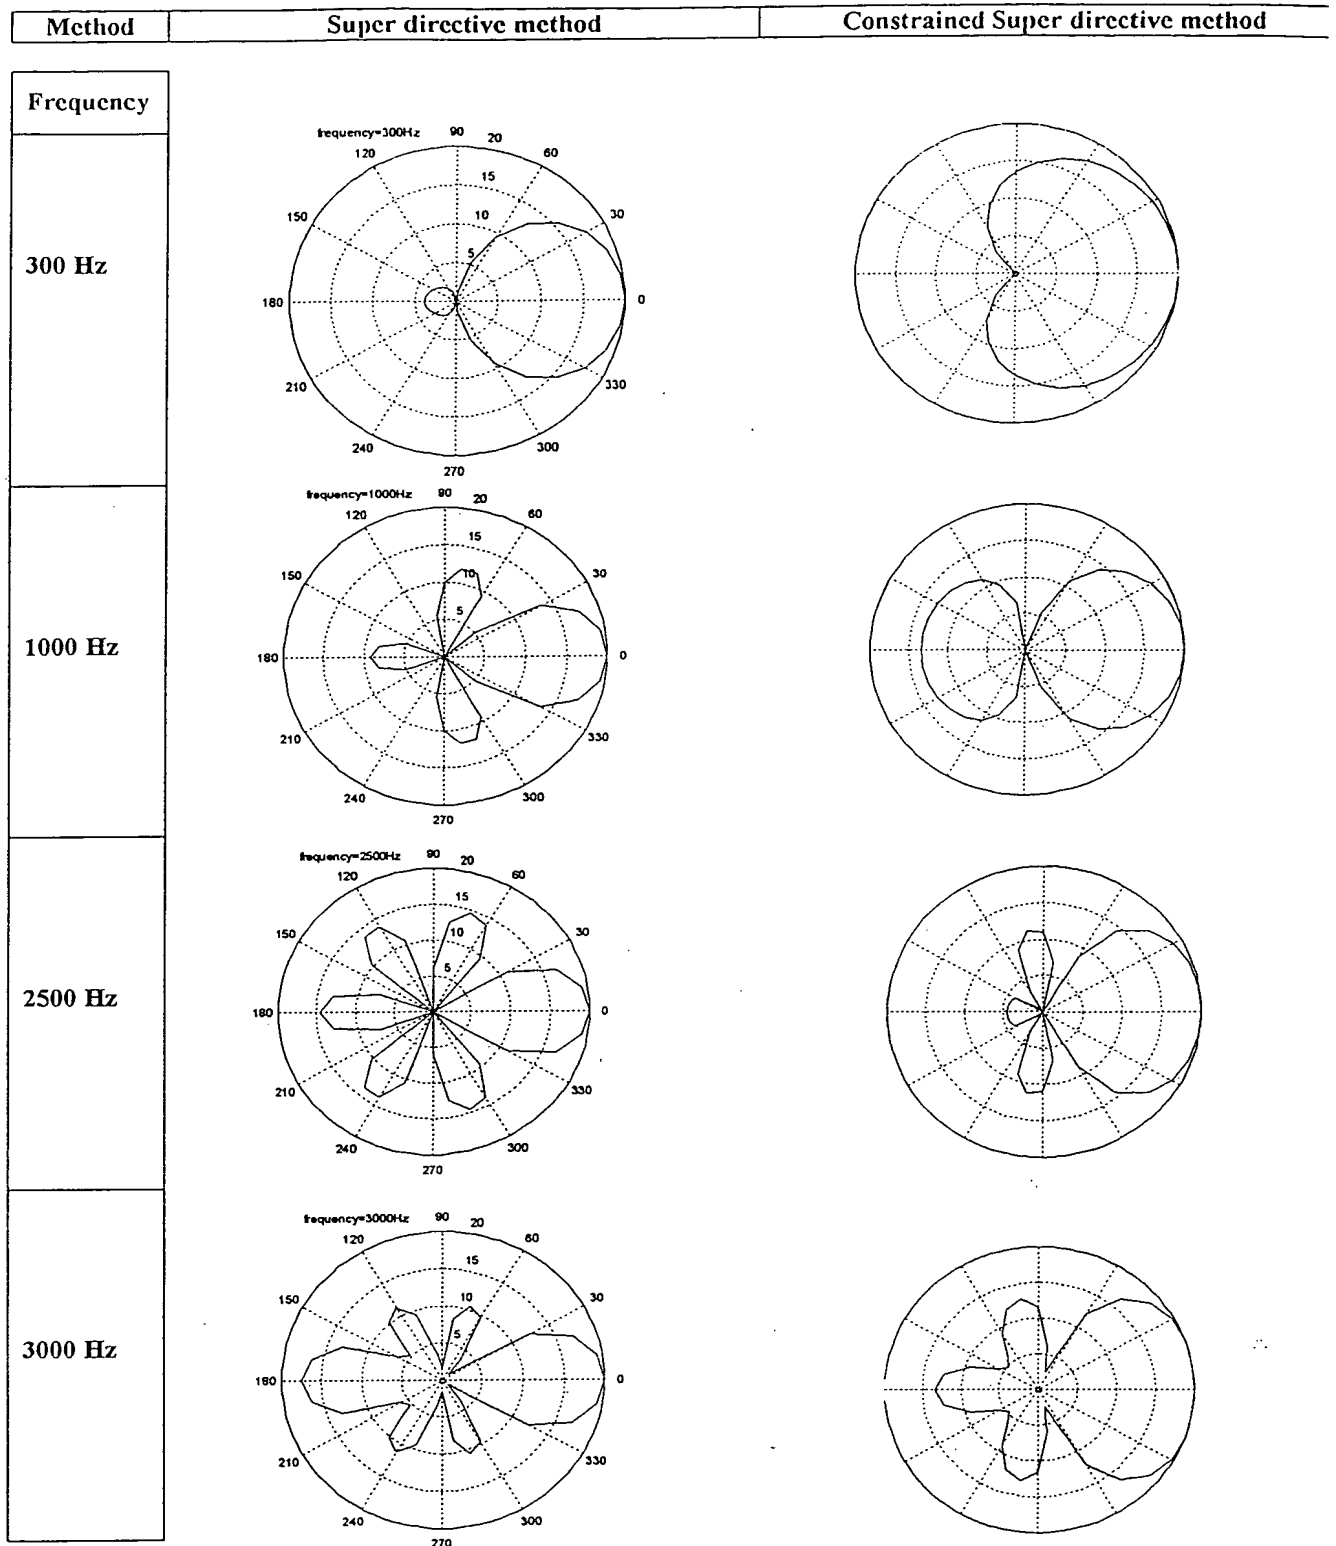


Figure 10, continued on next page

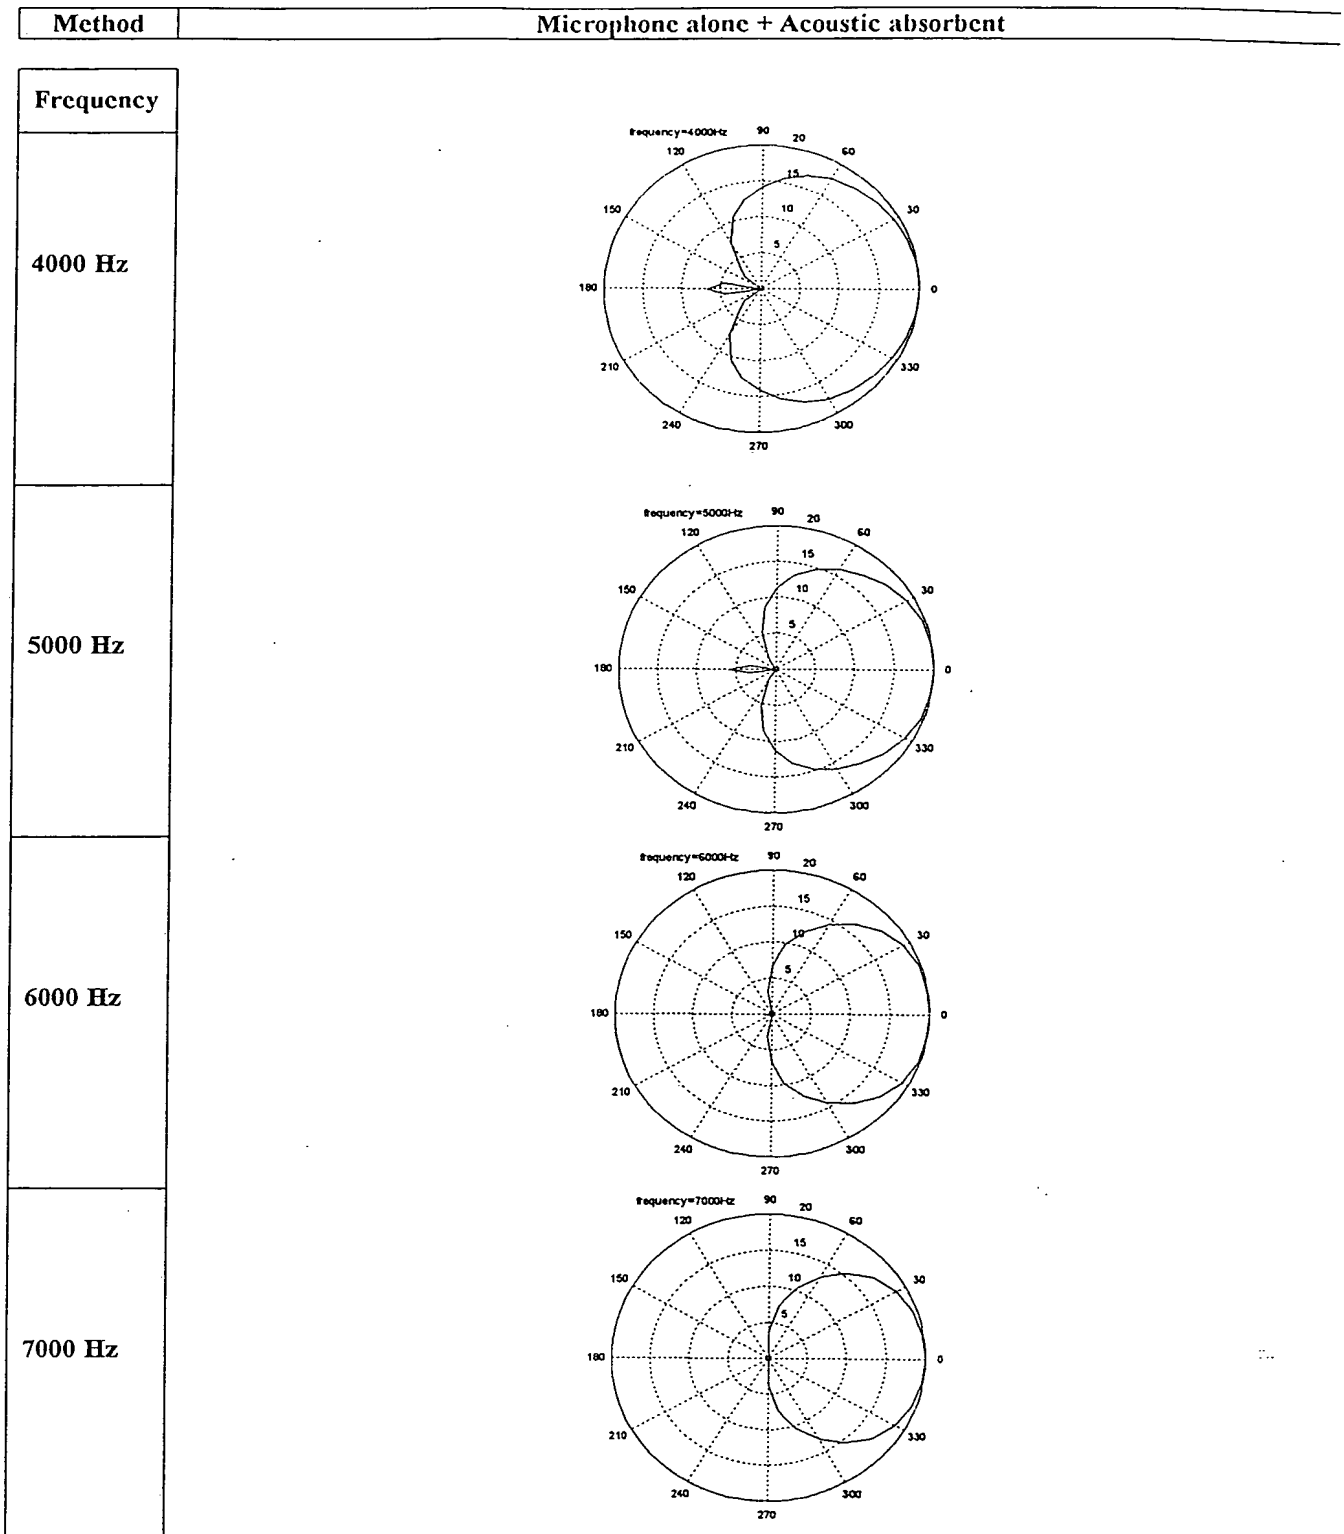


Figure 10: Beamforming. Synthesis of the method- BEM simulation.